

# Bakeout Effects on Dynamic Response of Spaceflight Cables

Kaitlin S. Spak<sup>1</sup>

*Virginia Tech, Blacksburg, VA 24060*

*Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91101*

Gregory S. Agnes<sup>2</sup>

*Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91101*

and

Daniel J. Inman<sup>3</sup>

*University of Michigan, Ann Arbor, 48109*

Spaceflight cables are investigated to determine the effect of bakeout on their dynamic response, including resonant frequencies and damping ratios. The addition of cable harnesses to spacecraft structures can affect the dynamic response of the entire structure, especially for lightweight structures with high cable mass ratios. Bakeout, a heat and vacuum treatment that spaceflight components must undergo, may change the dynamic stiffness of flight cables, and thus, the dynamics of the cabled host structure. Bakeout effects are examined by experimentally identifying natural frequencies and damping values for spaceflight cables before and after the bakeout process. After bakeout, the first natural frequency decreases by an average of 14% for all single-stranded cables, and by 24% for multi-stranded cable. The second natural frequency decreases by 8 to 17% for all cables. Bakeout also increases the damping percentage for single and multi-stranded cables. These results show that bakeout affects the dynamic response of spaceflight cables significantly and should be taken into account when using cable data for design purposes.

## Nomenclature

$A$  = cross sectional cable area,  $m^2$

$d$  = wire diameter, m

$E$  = modulus of elasticity,  $N/m^2$

---

<sup>1</sup> PhD Candidate, Mechanical Engineering Dept., 105 N Wilson 102, Pasadena, CA 91106, AIAA Student Member.

<sup>2</sup> R&D Engineer, 3850, 303-400D, AIAA Associate Fellow.

<sup>3</sup> Department Chair, Aerospace Engineering Dept., 3064 FXB, AIAA Fellow.

$EI$	=	bending stiffness, N-m <sup>2</sup>
$f$	=	applied external force, N
$G$	=	modulus of rigidity, N/m <sup>2</sup>
$I$	=	area moment of inertia, m <sup>4</sup>
$K_c$	=	curvature, m <sup>-1</sup>
$r$	=	wire layer radius, m
$t$	=	time variable, s
$w$	=	beam displacement, m
$x$	=	spatial variable, m
$\beta$	=	lay angle, rad
$\kappa$	=	shear coefficient
$\mu$	=	interwire friction coefficient
$\rho$	=	cable density, kg/m <sup>3</sup>
$\sigma_T$	=	tensile stress in wire before bending, N/m <sup>2</sup>
$\phi$	=	wire location angle, rad

## I. Introduction

CHARACTERIZATION of cable dynamics has become important to the design of space structures and satellites as cable mass percentages have increased [1]. Material science advances have created lighter weight structural materials, and increasingly complex instrumentation requires more wires and has increased the size and number of cables on any given space structure. In contrast, the conductive components of signal and power wires have not advanced; comparatively heavy copper and aluminum are still used as conductors, and EMI shielding is generally metal as well. These trends combine to result in a significant increase in cable mass as a percentage of the total spacecraft mass. Current craft design assumes a 10% cable mass, with some structures' cable mass being as high as 30% [2]. Figure 1 shows a space structure with cables distributed throughout the structure as is typical, connected to the host structure at multiple points with cable ties. Currently, cables are either neglected entirely in vibration models or are modeled as non-structural lumped mass, where the sum mass of the distributed cables is added to the total structure mass at the center of gravity of the structure model [3,4]. However, with the increased cable mass percentage and lightweight base structure, cables now need to be modeled as more realistic structural mass with the

capacity to affect the dynamic response of the structure as a whole. These distributed models require knowledge of the cable properties, and the bending stiffness value for a spaceflight cable is an important parameter in the structural model.



**Fig. 1 Wiring detail of instrument on ICE satellite showing distributed cables within<sup>4</sup>, attached to host structure with cable ties.**

Cable dynamics have been studied for decades, but the investigation of spaceflight cables so far has been limited to cables constructed for the purpose of testing. Cables that are constructed for actual flight must go through additional preparation and test, including "bakeout," a combination of heat and vacuum treatment designed to expedite the initial outgassing of flight hardware for contamination control [5]. Anecdotal reports from cable technicians suggest that cables seem stiffer after going through the bakeout process, but no study existed to affirm or quantify this difference. Since there is no existing literature on the effects of bakeout on flight cables, and quantification of cable dynamics is important for space structure modeling, this investigation was conducted to determine whether bakeout affects cable dynamics and spacecraft structural models that include cables. Thus, the objective of this investigation is to observe and quantify the effects of bakeout on spaceflight cable dynamics, including changes in natural frequencies and damping effects. Since cable dynamics have only been considered prior to bakeout, knowing that the bakeout process can shift the resonant frequency of the cables and influence damping is an important aspect to include in design and application of cable harnesses. This study improves the characterization of spaceflight cables by identifying and quantifying the changes in cable dynamic response due to

---



<sup>4</sup> NASA ICESat wiring detail image, <http://icesat.gsfc.nasa.gov/icesat/photogallery/glas-itgallery.php>

bakeout; these changes in bending stiffness and damping can now be included in structural models to improve their accuracy.

## II. Background

### A. Cable Terminology

Before describing the experimental methods used, a discussion of cable terminology is necessary, largely based on Costello's work on wire rope [6]. Cables are made up of a core wire or strand surrounded by layer wires or strands. A "wire" refers to an individual wire, commonly a twisted pair of conductors wrapped in an insulating material, and a "strand" is a collection of multiple wires twisted in a helical pattern. A single strand cable is a single wire for the core with additional wires making up the outer layers of the cable in a single helix shape, while a multi-strand cable has a strand for the core and is wrapped with more strands. The cores of the layer strands are single helixes, but the layer wires of the layer strands are in a double helix shape. Multi-stranded cables are more flexible than single-stranded cables of the same size and number of wires. Cables are designated by a  $m \times n$  description, in which  $m$  is the number of strands and  $n$  is the number of wires in each strand. Figure 2a shows a  $1 \times 19$  cable, a single-stranded cable that consists of one strand with 19 wires in that strand, and Fig. 2b shows a  $7 \times 7$  cable, a multi-stranded cable that consists of seven  $1 \times 7$  strands.

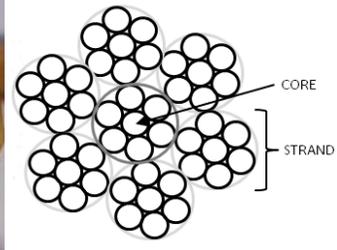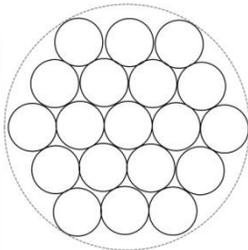

**Fig. 2a A single-strand  $1 \times 19$  cable.**

**Fig. 2b A multi-strand  $7 \times 7$  cable.**

The lay angle of a cable is the angle that the layer wires make with the core. Cables are right hand or left hand lay, which describes the direction that the wires or strands are wrapped around the core. Cables can be helically twisted, where each layer is wrapped in the same direction, or contra-helically twisted, where each successive layer alternates lay direction. After construction, cables may be tie-laced and then wrapped with a layer of Kapton tape.

Cables used for the initial investigation were hand twisted and hand wrapped, and showed a high degree of build-to-build variability. Based on previous theoretical studies, characteristics of helical cables with more than 19 wires are significantly affected by lay angle [7], so it was important to keep the lay angle constant for each cable

section. The cables used for the bakeout comparison were machine manufactured using a planetary machine to ensure a constant lay angle and exact overwrap overlap.


## **B. Bakeout**

Any cable that will become flight hardware goes through a bakeout treatment. Bakeout is a process that requires both high thermal treatment and near-vacuum pressure. This is so that any volatile gasses will diffuse out before the flight. Bakeout may take anywhere from a few hours to several weeks, depending on the item's intended destination and mission. All components of a space structure must go through bakeout to become flight ready, but components may be baked out separately and assembled in a clean room prior to launch. It is common for cables to be baked out separately from the main structure, which also means that vibration testing usually occurs before cables are added to the structure. This provides further motivation to model the effects of cables on structures since the structure cannot be tested with dirty equipment once it is assembled in a clean room. Common bakeout procedures include planetary protection bakeout, necessary for biological decontamination, and low-Earth orbit bakeout, used for objects that will not be venturing further than 2,000 km from the Earth's surface. A low-Earth orbit bakeout was used for this study, as cabling on satellites is of particular interest, and satellites are maintained at low-Earth orbit.

## **C. Effect of Cables on Host Structures**

Natural frequencies and damping ratios can be determined by measuring the frequency response function (FRF) of a structure, which relates the amplitude of vibration to an input force [8]. The addition of a cable to a host structure significantly changes the dynamic response of the structure by changing both the natural frequencies and amount of damping, and thus, the FRF data [4]. This is evidenced by the experimental data shown in Fig. 3, which compares the frequency response functions of a bare aluminum beam with the FRF of the same aluminum beam with a cable attached to it. For this case, the cable made up about 7% of the total structure mass, which is within the typical range for cable mass percentage on space structures. To correctly control the structure and avoid failure due to vibration events such as launch, it is important to be able to predict these altered frequencies and amplitude changes. Modeling cables as structural mass with accurate bending stiffness values for the cables should improve the predictive ability of cabled structural models. If the bakeout process is indeed affecting the bending stiffness of space flight cables, the changed stiffness value could lead to inaccurate models. Past research has shown that cable overwrap and jacketing leads to increased shear and viscoelastic effects that lead to greater internal cable damping

[9], so it is reasonable to question whether bakeout is affecting these parameters and thus affecting the damping and dynamic response of the cables.

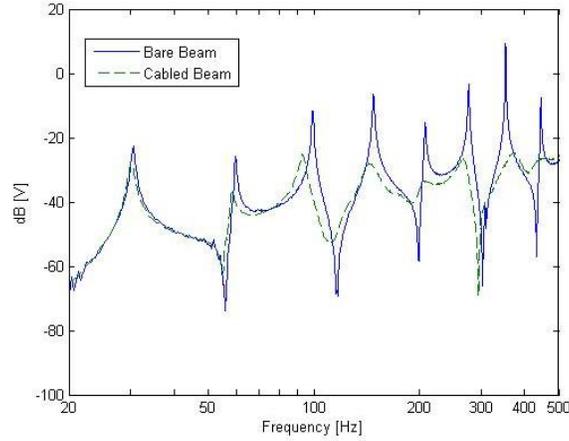

**Fig. 3 Comparison of frequency response functions for bare beam and cabled beam, showing non-uniform effect of cabling on dynamic response.**

### III. Theory

Cable bending stiffness is an important property for modeling cables as dynamic structural mass when cables are modeled as beams [10]. Background research confirms that bending stiffness must be included for an accurate cable model, and research conducted by the Air Force Research Laboratory Space Vehicles Directorate shows that including cables as lumped mass is no longer adequately accurate and that the interaction between cable and structure must be considered [4,11]. Research also shows that a beam-like model that includes shear effects and bending stiffness can model cable behavior reasonably well [12]. Thus, modern cable models depend on an accurate bending stiffness value. In this case, we are interested in the bending stiffness term,  $EI$ , of the equation of motion for a cable modeled as a beam, where dotted variables denote time derivatives and primes denote spatial derivatives:

$$\rho A \ddot{w}(x, t) - \frac{\rho EI}{\kappa G} \ddot{w}''(x, t) + EI w'''' = f(x, t) \quad (1)$$

Damping is not yet taken into consideration, although there is evidence that a carefully calculated bending stiffness value can incorporate some level of internal damping for cables [13]. Whereas bending stiffness for a solid homogenous beam of constant cross section is straightforward, calculation of bending stiffness value for a cable is significantly more difficult, and experimental data are required. First, the modulus of elasticity for a cable depends on the constitutive materials as well as the interwire friction within the cable, values that are nearly impossible to measure and difficult to estimate. The moment of inertia of a stranded cable is more complex than the moment of


inertia of a solid circular beam, and the bending stiffness actually changes depending on the cable curvature and whether the individual wires are sticking or slipping[10]. According to Papailiou's work on aluminum-conductor, steel-reinforced (ACSR) transmission cables [10], a multi-layer conductor has a maximum bending stiffness when all wires are in the stick state, and a minimum bending stiffness when all wires have slipped. Cable bending stiffness can be calculated as the sum of bending stiffness of each individual wire, calculated using the following equations:

$$EI_{base}^{wire} = E_{wire} * \frac{\pi d^4}{64} \cos \beta \quad (2)$$

$$EI_{stick}^{wire} = E_{wire} A * (r \sin \phi)^2 \cos^3 \beta \quad (3)$$

$$EI_{slip}^{wire} = \sigma_T A (e^{\mu \sin \beta * \phi} - 1) * \frac{r \sin \phi \cos \beta}{K_c} \quad (4)$$

These equations are summed over all wires to give the corresponding conductor bending stiffness at a certain conductor cross-section. Cable geometry is shown with lay and location angles identified for a 1X7 cable in Fig. 4.

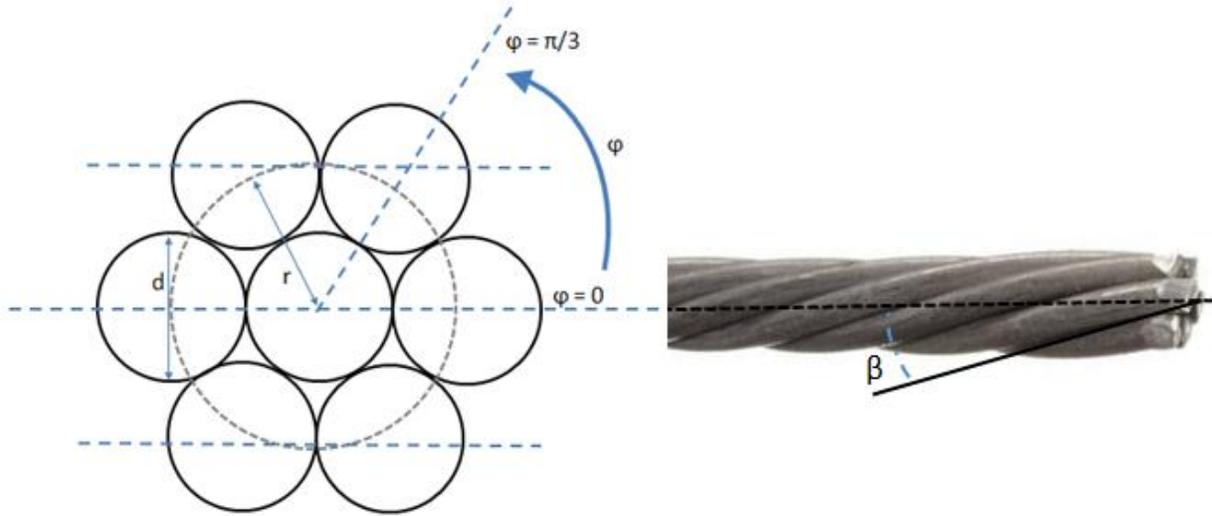

**Fig 4. 1X7 cable end and side view with equation parameters  $d$ ,  $r$ ,  $\phi$  and  $\beta$  identified.**

When the cable is in a sticking state, the bending stiffness is given in Eq. 5, and when in a slipping state (when bent past the critical curvature), the bending stiffness is a function of curvature and cable tension and is given in Eq. 6.

$$EI_{max} = \sum EI_{base}^{wire} + \sum EI_{stick}^{wire} \quad (5)$$

$$EI_{min} = \sum EI_{base}^{wire} + \sum EI_{slip}^{wire} \quad (6)$$

The cables in this study, although much smaller in diameter, share the same basic construction of a core wire surrounded by layer wires and have the same geometric layout as a stranded ACSR cable, as well as having similar

stick-slip behavior due to friction between the wires. Although Papailiou provides a starting point for more accurate cable bending stiffness estimation based on these similarities, there are limitations to these equations that make experimental investigation necessary. First, the equations were developed for solid metal wires in a 1X7 single strand configuration; the inclusion of EMI shielding and viscoelastic insulation material around each wire is not taken into account, both of which are present on wires used for spaceflight. The  $E_{wire}$  value in Eq. 2 and Eq. 3 is a single value for pure materials, but for a wire comprising a conductive core, EMI shielding, and insulation, the value of  $E$  can only be estimated using a rule of mixtures approach to give an upper and lower bound. In addition, the coefficient of friction between wires is difficult to determine, and is dependent on the outer wire material and radial inward pressure of each wire due to overall tension in the cable. Finally, once again the effect of bakeout has not been considered, and the modulus of elasticity or moment of inertia of a baked wire or baked cable might be different due to temperature and vacuum effects. Therefore, this experimental study was conducted to provide concrete values for cable bending stiffness and a comparison between cable stiffness before and after bakeout. Table 1 provides the theoretical upper and lower bound for the bending stiffness values for each of the four cable sizes tested, although it should be noted that these are rough estimates based on the assumption that a conducting wire can be modeled as a concentric fiber matrix and that the equations developed for ACSR cables are valid for similarly stranded electrical cables.

**Table 1 Bending stiffness bounding values calculated for four cable types**

Cable	Bending Stiffness, N-m <sup>2</sup>	
	Lower Bound	Upper Bound
1X7	3.0	3.5
1X19	21.8	26.0
1X48	168.4	202.7
7X7	101.1	187.7

#### IV. Experimental Setup and Methods


The unbaked cables were excited with a shaker and the dynamic response was measured with a laser vibrometer. This non-contact measurement method allowed for minimal mass loading on the cable since no accelerometers were required for data collection. A force transducer was used at the driving point to measure the input force and the vibrometer collected the response information from the driving point for single point evaluation. Then, the cables

were baked out and retested using the same method to produce data for comparison. This vibration testing and analysis followed the methods and recommendations of Ewins [14] whenever possible.

### **A. Initial Investigation and Method Development**

To examine the effect of bakeout, initial experiments were required to develop a reliable method to extract cable frequency and damping information from vibration testing. First, an examination of a variety of cables was conducted to determine how to measure the dynamic response of the cable itself and what type of cable would represent a typical spaceflight cable and produce repeatable frequency response functions to ensure a valid and meaningful comparison between the treated and untreated cables. Preliminary experiments were run on these spaceflight cables to determine what factors and parameters would need to be controlled [15]. A "standard run" was developed to acquire clear frequency response functions that identified the first and second modes, and these methods were used on a new set of cables manufactured more consistently. Cables ranging in size from 1X7 to 1X48 were found to be typical, and copper wire with tinned copper EMI shielding and Tefzel insulation with lacing ties and Kapton overwrap was common.

The dynamic response of the cable was determined by exciting the cable through a tensioned wire using a modal shaker, and measuring the response both at the driving point and along the cable with a Polytec PSV-400 laser vibrometer. A test fixture was created that held the cable in place vertically using TyRap cable ties and Thomas and Betts TC-105 cable tie loops. This method was chosen both for its similarity to a pinned boundary condition and because this is the most common method of attachment for cables on actual structures, as evidenced in Fig. 1. This attachment method had also been used in previous studies [11,12] with good results. The attachment points were mounted away from the vertical support to ensure minimal interaction with the host structure, and the shaker was suspended to isolate the excitation vibrations. Buffer zones above and below the region of interest were included in the test setup to mitigate end effects and simulate the real-life scenario of a cable attached at multiple points. The test setup, with test section and upper and lower buffer zones identified, is displayed in Fig. 5. Figure 6 shows a closer view of the driving point attachment, where the tensioned wire from the shaker attaches to the load cell and then to the cable through another TC-105 mounting tab.

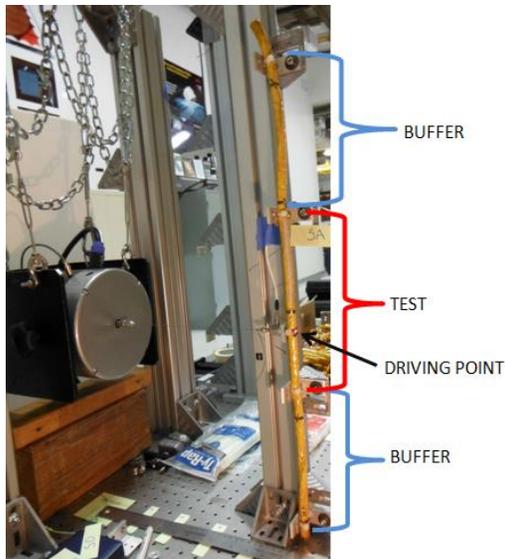

**Fig. 5 Test set up for cable testing.**



**Fig. 6 Attachment of tensioned wire at driving point.**

The next step was to develop a standard run to ensure that cables would be tested in the same way for each trial before and after bakeout. Initial experiments were conducted to determine which factors would affect the frequency response for the cables; excitation method, tension in the cable, zip tie attachment method, cable orientation, and length and tension of the excitation string were varied individually. Cables were mounted in the test fixture in the same way each time, with a single variable changed each time to observe the effects of changes in the test setup or software on the cable response. Cable tension and cable tie tightness were important factors to keep constant for each test section, while excitation method and excitation string length and tension did not affect the results. Further details of the standard run development are available in [15]. It was also important to keep the static displacement of the cable to a minimum as a precaution, as curvature in the cable would cause wires to slip and thus change the bending stiffness based on the equations of [10]. From these tests, a "standard" test run was developed which set standards for a variety of characteristics to be controlled. The standard test run requires a 0.254 m test section bordered by 0.2 m buffer sections pinned above and below the test section with 8.89 N of tension in the cable, applied via a hanging weight hung from a hose clamp secured to the cable to distribute the weight evenly. The cable was attached with a cable tie at one end and tensioned with the hanging weight; the remaining attachment points were then secured, and then the weight was removed. The cable ties were fastened with a cable tie gun on the tightest setting, so tension in the cable was maintained after the removal of the weight. White noise excitation was applied at 0.3 volts at 8.3 cm from the bottom of the test section via a 0.24 m tensioned string at medium DC offset. The input excitation acceleration corresponded to  $\pm 0.155 g$  for the largest (7X7) cable and  $\pm 0.38 g$  for

the smallest (1X7) cable; these values are comparable to the measured launch accelerations of  $\pm 0.4 g$  for STS-41 [16] and are less than the lateral launch acceleration of  $\pm 2 g$  for the Ariane 5 [17]. The standard test run also dictates a static cable displacement due to excitation string tension of less than 0.6 mm, and all pinned connection points secured by cable ties tightened to "tight" setting 5 on a Thomas and Betts cable tie gun. Between each standard run, the cable was removed from the test fixture and reattached for each individual run. A low pass 5kHz filter and Hanning window were applied, and 30 averages were taken per test run. All of these features comprised the standard test run to ensure experimental repeatability.

The data acquisition software was set to gather data through 2000 Hz, although only the region from 0 to 500 Hz was of interest; this kept the amplitude error to less than 5%<sup>5</sup>. The PSV VD-08 velocity decoder was used as part of the Polytec software. On each day of testing, the cable response was also scanned once at intervals of 0.9 centimeters, encompassing the entire test section, to visualize the mode shapes and ensure that the cable transverse modes were identified correctly.

The work done to develop the standard run showed that helical cables had a frequency dependence on orientation of the cable in the test fixture as measured with respect to the coil plane. Contra-helical cables, in which each layer alternates lay direction, were used to eliminate this variation. Contra-helical cables were procured that were machine-manufactured to eliminate the build-to-build variability shown in hand-made cables used in previous studies of cable dynamics. The cables were made on a planetary machine, tie wrapped every 4-6 inches, and then overwrapped with Kapton tape by machine. The machine-made cables were straighter, fit into the test fixture without torque at the attachment points, and had a more uniform Kapton overwrap. Figure 7 shows the cables used for this study. Five samples each of configurations 1X7, 1X19, and 1X48 were used to compare single-stranded cables, as well as five samples of 7X7 to include a multi-stranded cable in the comparison. All cables were made of M27500-26TG2T14 wire, a wire commonly used for flight missions.



**Fig. 7 Cable samples used for the study; from bottom to top and left to right, 1X7, 1X19, 1X48, and 7X7.**

<sup>5</sup> Polytec Scanning Laser Vibrometer PSV-400 Hardware Manual, .pdf file provided by Polytec, Inc. via email

Table 2 shows the average dimensions of each cable sample for the three samples of each type of cable selected for the bakeout process. Since even the machine-produced cables showed variation from section to section, it was important that the cables be compared individually to determine the bakeout effects. Lay angles varied by less than 1 degree for the 1X48 and 7X7 cables, 2.5 degrees for the 1X19 cables, and 3.5 degrees for the 1X7 cables. Mass, length and diameter measurements were extremely consistent, and negligible mass was lost due to the bakeout process.

**Table 2 Cable physical measurements**


	No. of Wires	Mass, kg	Length, m	Diameter, m	Lay Length, m	Lay Angle, deg
1X7	7	0.0725	0.769	0.0075	0.0688	19.02
1X19	19	0.1905	0.778	0.0127	0.1325	16.85
1X48	48	0.4445	0.774	0.0203	0.2118	16.79
7X7	49	0.4944	0.775	0.0217	0.2128	17.75

### B. Unbaked Cable Testing

At this point, the study of interest truly begins: the comparison of the dynamic response of a cable before and after bakeout treatment. After developing the standard run and method to test each cable section in the same way, the unbaked cables were tested 50 times for each cable, 10 runs for each of the five sections, measured at the driving point. In addition, scans of each cable, in which the response of the cable was measured at discrete points along the entire length of the cable (including both buffer zones and test zone), were taken to identify and visualize the cables' mode shapes and ensure accurate comparison of modes.

The experimental data from the unbaked cables showed significant variation between cable sections, although each section had repeatable, nearly identical results from run to run. Thus, rather than use all of the sections for comparison, the most "well-behaved" cables were selected to be baked out and compared, where "well-behaved" cables showed the least spread among fundamental frequency values and most similarity between frequency response functions for each trial. Natural frequencies and damping ratios can be evaluated for each peak in the frequency response function, and observing the vibrometer animation of data at the peak frequencies showed the motion for each mode and mode shape. Figure 8 shows the frequency response function from a single run of a 1X7 cable with the first and second beam modes identified, as well as the interaction modes. The form of the frequency response function was similar for all single stranded cables; there were clear modes for the first and second beam modes, in which the center test section of the cable showed the symmetric mode shapes that would be expected for a


vibrating beam. Between the first and second beam modes were "interaction" modes, in which the beam modes of the buffer sections affected the test section. The thicker cables showed interaction modes that were nearly equal in magnitude to the first beam mode, and laser scans had to be used to conclusively identify the first beam mode. Each of the three "well-behaved" sections for each cable type was tested 13 times with the standard run procedure and scanned at least twice along the length of the cable at 58 different points to yield the unbaked cable data.

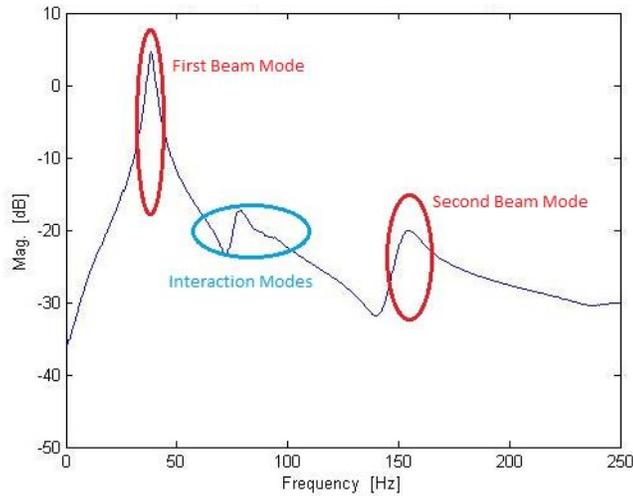

**Fig. 8 Anatomy of a single-strand cable mobility frequency response function.**

### C. Bakeout Procedure

The standard Earth orbiter bakeout process requires pressure on the order of  $1 \times 10^{-5}$  torr at  $+105 \text{ C} \pm 5 \text{ C}$  for 72 hours [5], although this varies depending on the hardware and ultimate destination of the craft. The cables were baked out over 72 hours at a near-constant 105 C temperature and a low pressure of  $1.3 \times 10^{-5}$  torr. Cables were weighed before and after bakeout to 1 gram resolution and showed negligible mass change. Figure 9a shows the cables racked for bakeout and Fig. 9b shows the bakeout chamber used. Cables were kept straight for transport and bakeout.

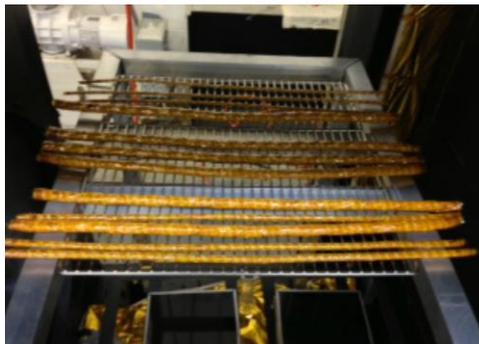

**Fig. 9a Cables racked for bakeout.**



**Fig. 9b Bakeout chamber.**

#### **D. Baked Cable Testing**

The baked-out cables were then tested using the same standard run methods and test configuration. Each section was again scanned along the entire length of the cable to determine if there were differences in mode shapes and to verify that the frequencies being compared were indeed referencing the same mode. Single point measurements were taken at the driving point to find the first and second frequency value for each run for each section. Each of the three baked sections for the four different cable types were tested between 14 and 18 times, with scans run on each of the baked cable sections two or three times. All test procedures and methods were kept exactly the same, so the only change was the bakeout treatment. Based on the comparison between the data from the baked cables and the previously collected data from the same cables before bakeout, the bakeout procedure does have an effect on cable dynamics, as revealed in the next section.


### **V. Results**

Data were analyzed using laser vibrometer software and ME Scope. Frequency response functions and mode shape visualizations were determined from the raw vibrometer data, and damping values were determined using ME Scope software. ME Scope was also used to verify the frequency values extracted from the vibrometer software. The frequency response functions indicated the natural frequencies, and mode shape identification ensured valid comparison between the same modes; although the first and second modes were very clear for the 1x7 and 1X19 cables, there was some ambiguity in the frequency response functions for the larger cables due to the similarity in magnitude between the first mode and interaction modes, so comparison of the mode shapes through scan inspection ensured that the natural frequencies were being compared appropriately. The single stranded cables consisted of a single wire surrounded by layer wires in configurations of 7, 19, or 48 wires. They all showed a clear first and second frequency separated by interaction modes. Comparison of individual sections and individual section data can be found in the Appendix; frequency responses for each section showed less variation overall than for each type of cable as a whole. It appears that even very carefully machine-manufactured cables still show differences from section to section, although the differences were much less than for hand-built cables tested previously.

#### **A. Single Stranded 1X7 Cable**


Figure 10 shows the comparison for all of the 1X7 cable sections in which red dashed lines are the unbaked cable responses and blue solid lines show the cable responses after bakeout. For every section of the 1X7 cable, the

first and second natural frequencies shifted to the left beyond the variation between the cable sections. The first and second beam modes are much more consistent in frequency and amplitude than the interaction modes. This is likely due to interaction modes being very dependent on the constriction of the cable at the attachment points; although cable tie tension was kept constant, the random way that the individual wires were compressed as the tie was tightened for each installation of the cable in the test fixture may have contributed to the interaction mode variation.

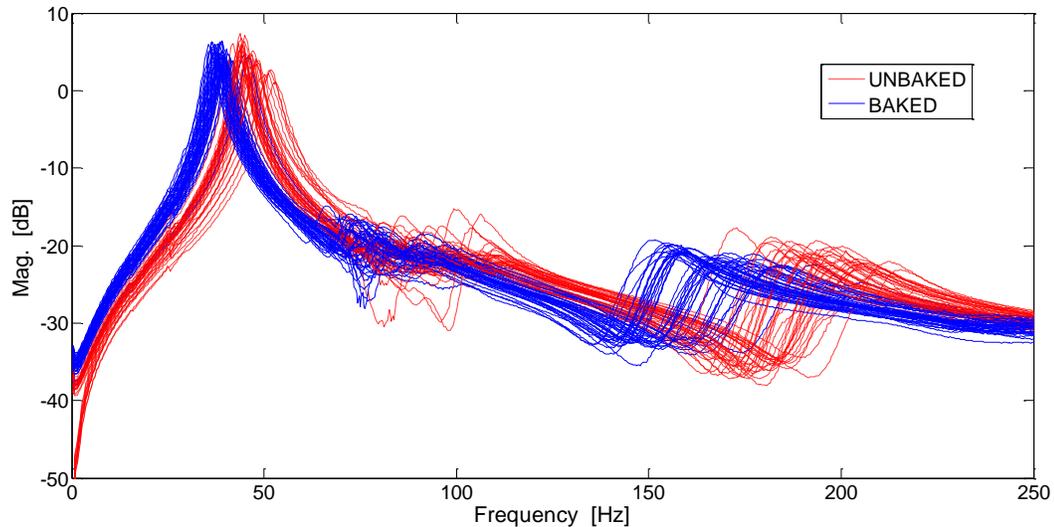


**Fig. 10 Comparison of cables before and after bakeout, showing a decrease in natural frequencies for 1X7 cable.**

To show where the first and second modes occur, the cable was scanned and mode shapes were identified. The cable showed clear beam modes which were used to identify the modes of the test section. The unbaked cable first

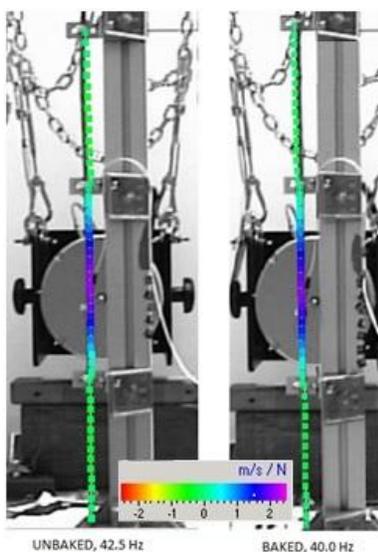

**Fig. 11 First beam mode comparison between unbaked and baked cable, 1X7.**


frequency occurs around 45 Hz and the second frequency occurs around 180 Hz. The modes that occur between 50 and 100 Hz are interaction modes, in which the buffer zones show their first beam modes. This is valuable information since cables are usually attached in multiple places and would show these interaction modes in practice as well. The first mode can be differentiated from the

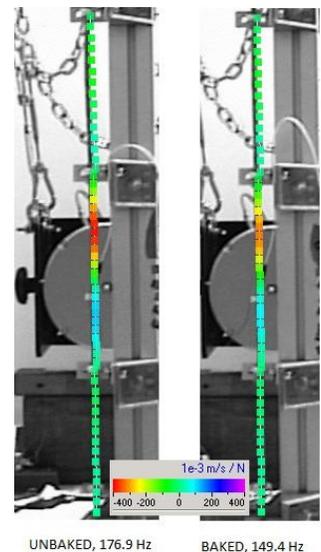

**Fig. 12 Second beam mode comparison between unbaked and baked cable, 1X7.**

interaction modes by the lack of activity shown in the buffer zones at this point. Interaction modes are characterized by displacements in the buffer zones that are similar in magnitude to the center test section. Figure 11 shows the mode shapes for the 1X7 cable from the laser vibrometer software; the left side of the image is an unbaked cable, where the first beam mode occurs at 42.5 Hz, and the image on the right side is the same cable section after bakeout, showing the same first beam mode at 40.0 Hz, a difference of nearly 6%. The mode shapes are nearly identical in magnitude, but occur at different frequencies. Figure 12 shows the comparison between mode shapes for the second frequency; here, the unbaked cable resonates at 176.9 Hz and the baked cable at 149.4 Hz, a difference of over 15%. Here however, the magnitude of the baked cable is somewhat decreased, indicating higher damping due to bakeout changes.


Figure 13 shows a graph of the first natural frequency value taken from single point data for all of the unbaked and baked trials for the 1X7 cables, again showing a clear decrease in frequency for the baked cables. The 1X7 section C cable was the only cable that showed a downward trend in frequency for the first few unbaked trials. This is likely due to the "bedding in" effect, in which continued vibration of the cable changes the frictional force between the wires and thus decreases the natural frequency. The term "bedding in" is used throughout Raoof's research on spiral strands and differentiates an old cable that has experienced vibration from a newly manufactured cable [18]. After the first five trials, it appears that the cable is completely bedded in. It should be noted that efforts were made to vibrate all cables by the same amount and same duration to eliminate any differences due to bedding in. It should also be noted that section C of the 1X7 set was the most poorly behaved of all of the cable samples, which is observed in its unusually high frequency values at trials 10 and 12 of the baked cable testing. Overall though, it still follows the general trend shown clearly by 1X7 sections D and E, which show an average decrease in first natural frequency of 12.7% and 17.2% respectively.

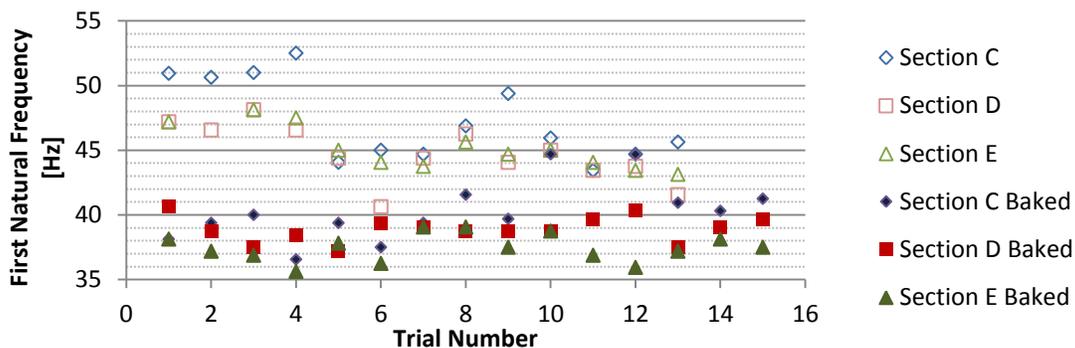

**Fig. 13 First natural frequencies for 1X7 cable sections, showing lower frequency trend of baked cables.**


## B. Single Stranded 1X19 Cable

Frequency response functions, mode shapes, and natural frequencies were collected for the 1X19 cables as well. The frequency response functions for all baked and unbaked 1X19 trials are shown in Figure 14, again showing a decrease in effective stiffness for both first and second beam mode frequencies.

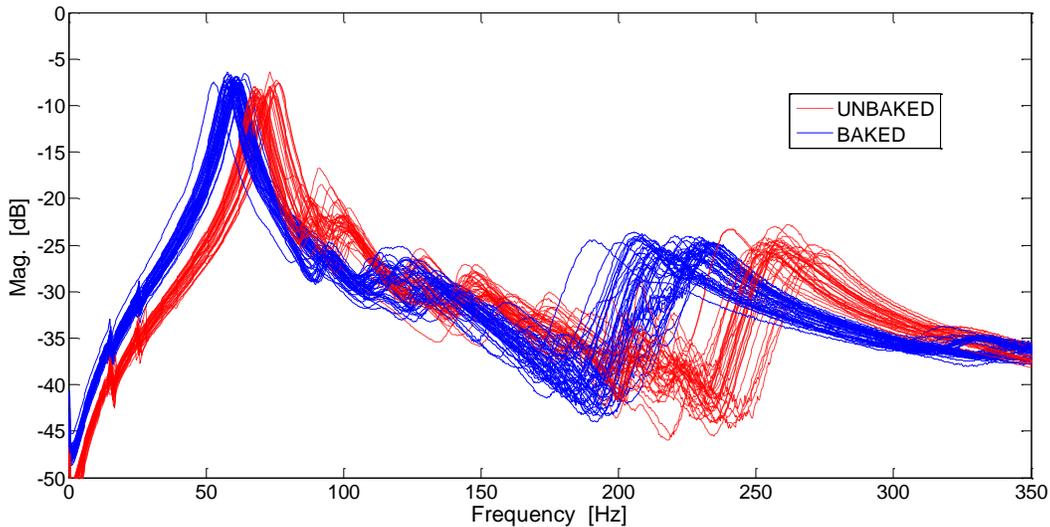


**Fig. 14 Comparison of unbaked and baked cables, showing a decrease in natural frequencies for 1X19 cable.**


Figure 15 and Fig. 16 show the matching mode shapes for the first and second beam modes with a 15% reduction in the frequency of the baked cable shown on the right side of each figure. Figure 17 shows the trend in first natural frequency as compared between the unbaked and baked cable trials from the single point data of the 1X19 trials. The frequency difference here ranged from 13.2% to 16.2% and in no trial was the baked cable frequency ever higher than the unbaked cable frequency. This cable, being the medium sized cable that the standard run was designed for, showed excellent repeatability and a clear trend through all trials. No bedding in effect was observed.

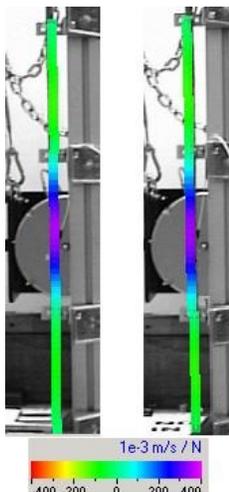

**Fig. 15 First mode comparison for 1X19 cables, showing difference of 15.3%.**

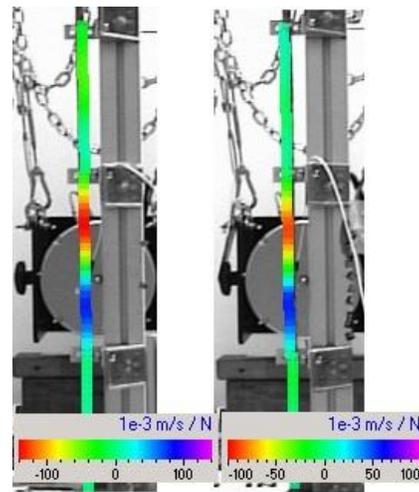

**Fig. 16 Second mode comparison for 1X19 cables, showing difference of 15.1%.**

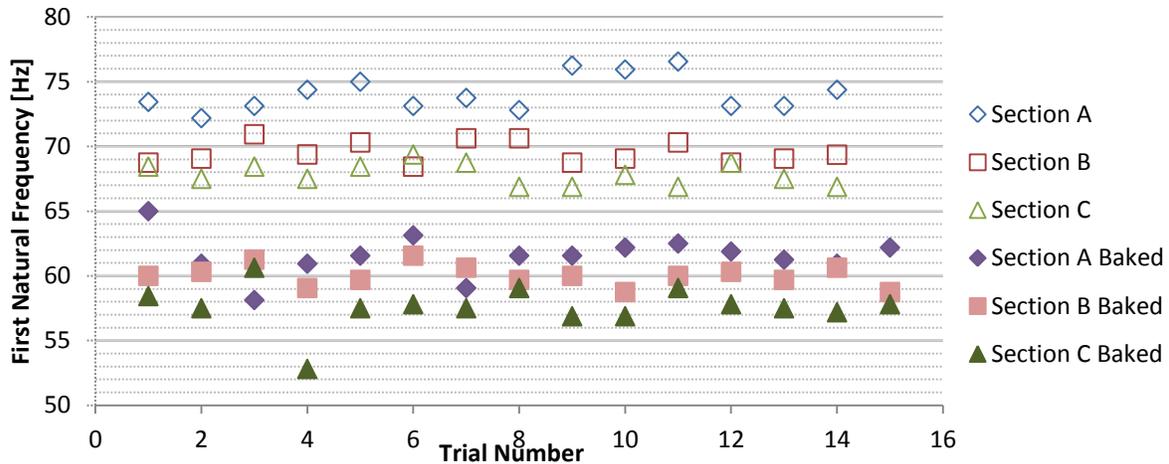

**Fig. 17 First natural frequencies for 1X19 cable sections, showing lower frequencies of baked cables.**

### C. Single Stranded 1X48 Cable

The much stiffer cable showed frequency response functions with modes that could not be as easily identified by inspection alone. This is where the identification of the matching mode shapes became necessary since there was ambiguity in the peaks of the frequency response functions. Figure 18 shows the FRF's of all of the 1X48 trials, where the first beam mode of the cable test section is no longer as clearly defined due to the close proximity of the interaction modes (which occurs because this cable is much stiffer and larger, and experiences less constriction at the pinned connections between the buffer zones and test section). Figure 19 and Fig. 20 show the 1X48 cable's first and second mode shapes, respectively. The unbaked cable resonated at 117.2 Hz for the first beam mode and 389.1 Hz for the second beam mode, while the same cable after bake out resonated at 107.8 Hz and 348.1 Hz, differences of 8% and 10.5% for the first and second modes. Figure 21 shows a graph of the first peak frequency values from single point data. As with the other single-strand cables, every baked trial showed lower frequency values than every unbaked trial.

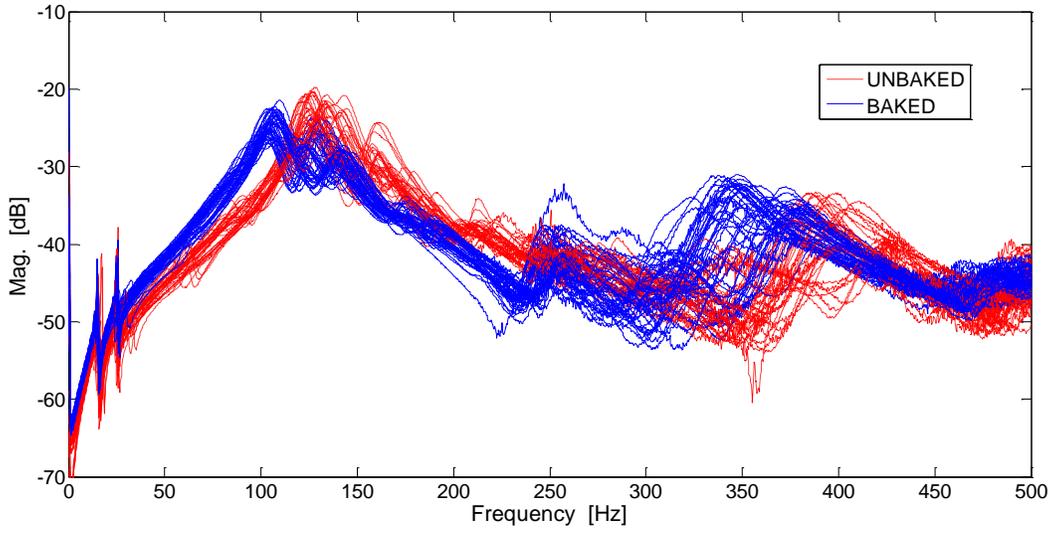


Fig. 18 Comparison of unbacked and backed cables, showing a decrease in natural frequencies for 1X48 cable.

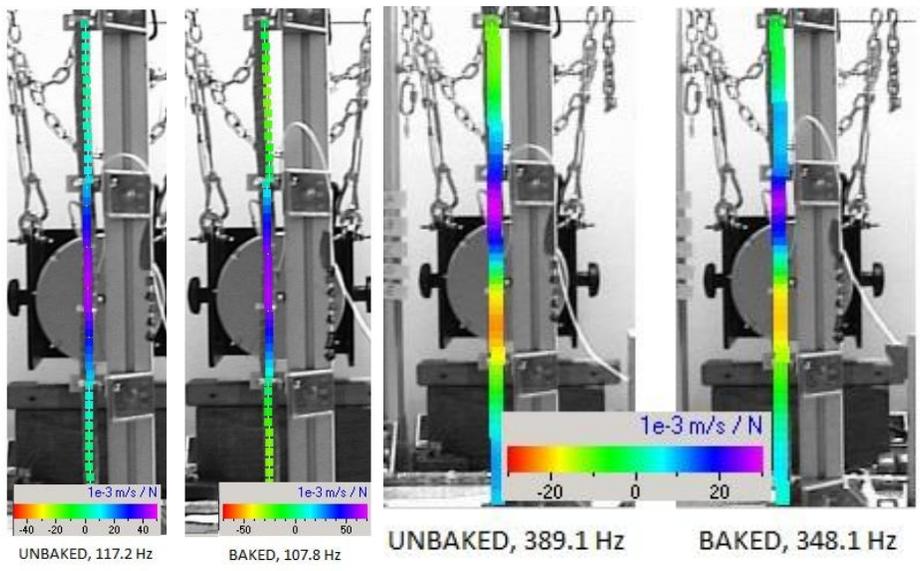


Fig. 19 First mode comparison for 1X48 cables. Fig. 20 Second mode comparison for 1X48 cables.


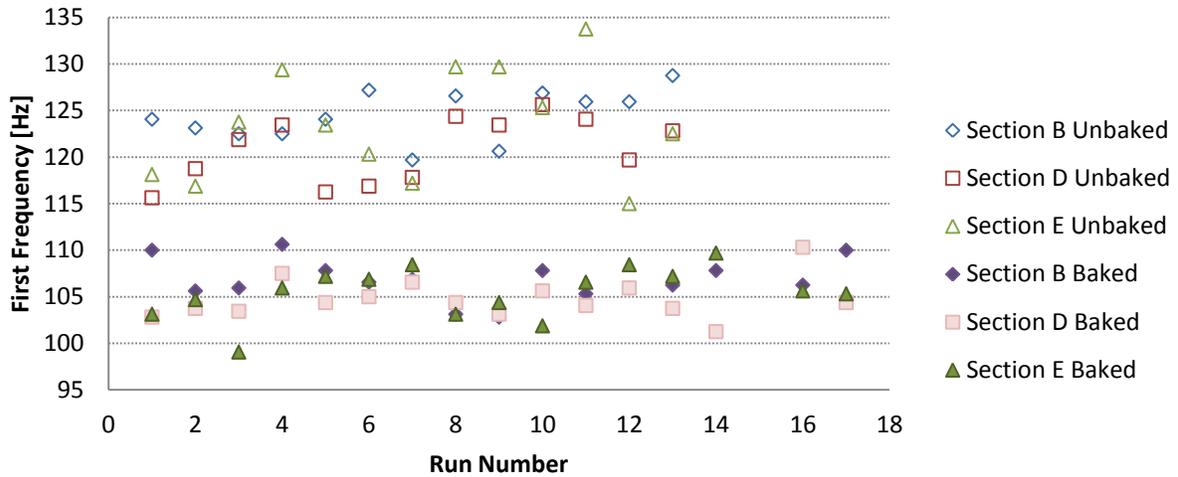


Fig. 21 First natural frequencies for 1X48 cable sections, showing lower frequencies of baked cables.

#### D. Multi-Stranded 7X7 Cable


The 7X7 cable was made to compare to the 1X48 cable; although both cables have about the same number of wires, the multi-stranded cable is significantly more flexible since it is made up of strands instead of individual wires. The data collected were consistent with the theory; the multi-strand cable was less stiff with lower first and second natural frequencies than the single-strand cable of the same size.

Proximity of the interaction modes becomes an even greater issue for the 7X7 cable, and inspection of the mode shapes is necessary to determine which frequencies correspond to the first and second beam modes of the cable test section. Figure 22 shows the FRFs for all 7X7 cable trials, still showing a left shift for the baked cables. The more flexible multi-stranded configuration does show a lower natural frequency than the 1X48 cable with similar wire count as expected. Although the interaction modes appear larger and in different locations than for the single stranded cables, the overall pattern of frequency decrease still occurs.

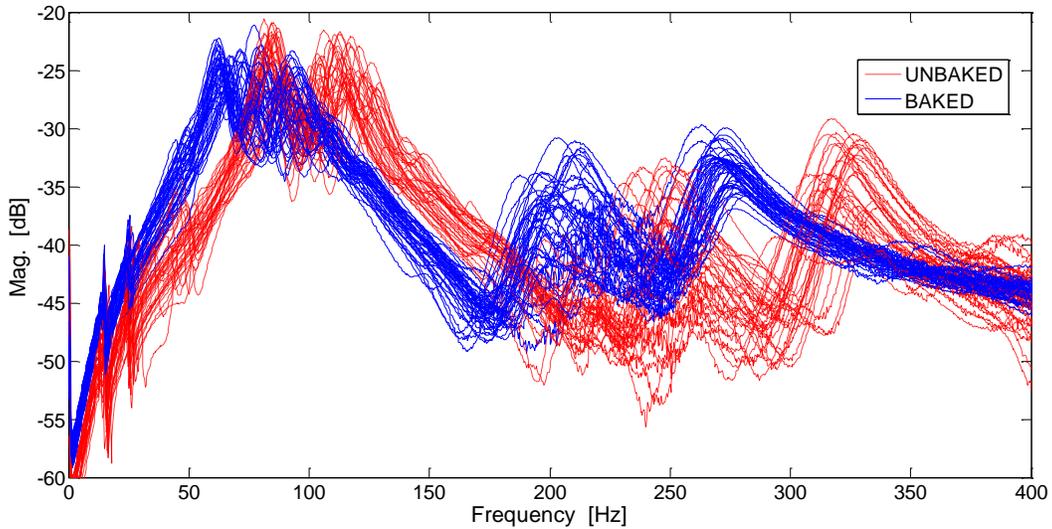

**Fig. 22 Comparison of unbaked and baked cables, showing a decrease in natural frequencies for 7x7 cable.**

It is not necessarily the highest peak in the FRF that corresponds to the first frequency, which indicates that the interaction modes may be just as important in these larger cables to consider when determining maximum amplitude. Figure 23 and Fig. 24 show the scan images for the first and second modes of the 7X7 cable. The first frequency is reduced from 81.9 Hz to 63.7 Hz, and the second frequency is reduced from 234 Hz to 194 Hz, differences of almost 23% and 18% respectively. Figure 25 shows another clear separation between baked and unbaked cable frequencies, with all baked frequencies for the 7X7 cable significantly lower than the unbaked frequencies.

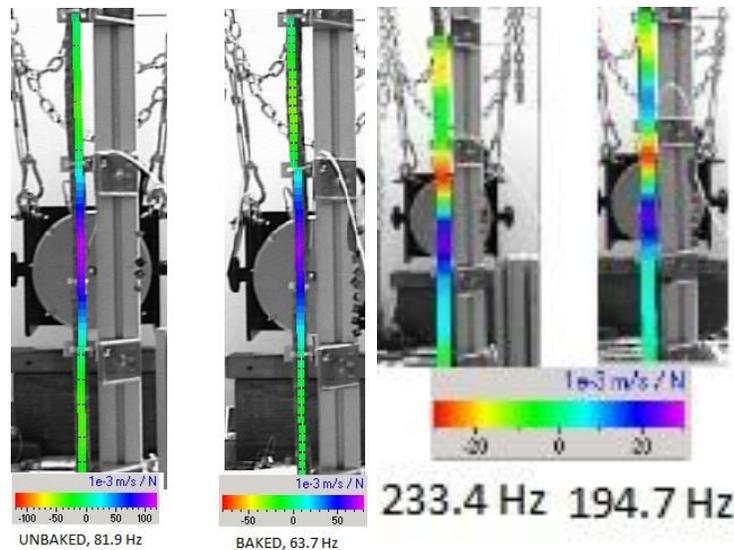

**Fig. 23 First mode comparison for 7X7 cables. Fig. 24 Second mode comparison for 7X7 cables.**

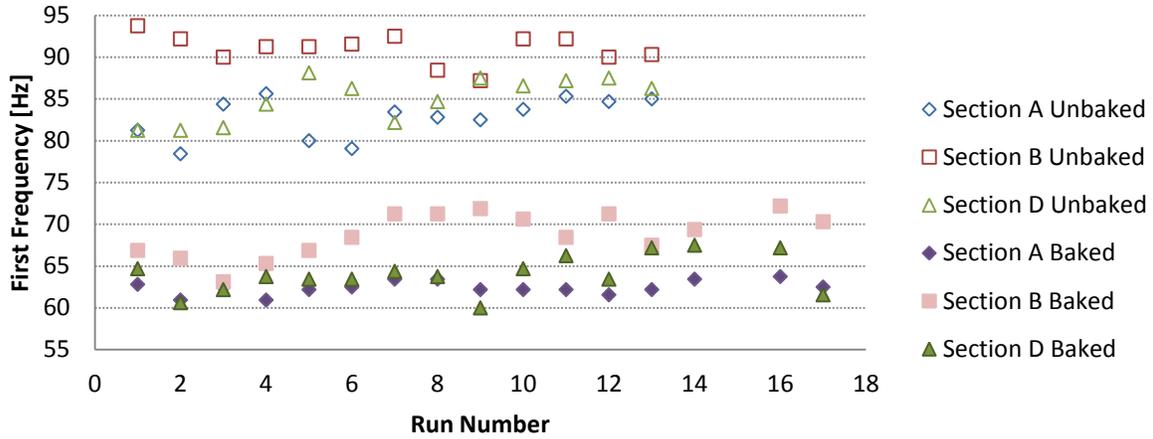


Fig. 25 First natural frequencies for 7X7 cable sections, showing lower frequencies of baked cables.

### E. Overall Observations and Results

Data were taken in the form of multiple single-point runs, and scans of the entire cable. Results from the single point values for each of the three test sections for each of the four types of cable were averaged. Overall averages made up of the section averages were then recorded for each type of cable and are presented in Table 3. These averages are based on 39-54 runs per cable type, removed and remounted in the test section each time. The results from the single point data agreed well with averages taken from the laser scans and those evaluated using ME Scope. The change in frequencies was consistent; all unbaked first frequencies for single stranded cables decreased between 14% and 15% after bakeout on average. However, the multi-stranded cable showed a more significant reduction in frequency at both the first and second beam modes. All values presented in Table 3 are averages from measurements taken at the driving point.

Coefficient of variation was calculated for the baked trials, the unbaked trials, and then for all of the trials together for each cable. The coefficient of variation ranges from 0.015 to 0.06 for unbaked trials, from 0.02 to 0.05 for baked trials, and from 0.05 to 0.2 for combined unbaked and baked trials. The coefficient of variation for the combined trials for each frequency for each cable was larger than for the baked or unbaked trials in every case, and was almost always larger by a factor of 2 to 4. This shows that the frequency change exhibited by the baked out cables was greater than what could be expected due to experimental variation. The list of coefficients of variation for each section and for each type of cable overall can be found in the Appendix. More data are available from

scans of the entire cable, but as the frequencies were within the distribution of the single point data and agreed with the overall results, the additional scans were considered superfluous.

**Table 3 First and second frequencies for baked and unbaked cases for four different cable configurations**

Cable	Average First Frequency			Average Second Frequency		
	Unbaked, Hz	Baked, Hz	% Change	Unbaked, Hz	Baked, Hz	% Change
1X7	46.1	39.3	14.8%	195.6	166.8	14.7%
1X19	70.5	59.9	14.9%	257.9	220.5	14.5%
1X48	122.9	105.7	14.0%	394.5	360.4	8.6%
7X7	86.3	65.1	24.6%	247.9	206.0	16.9%

Damping values were also investigated by using ME Scope to determine damping percentage at the first mode. While the magnitude of the frequency response functions did not indicate a clear trend for damping behavior after bakeout, the percent damping calculated using ME Scope showed an increase in damping percentage for all cables after bakeout. Table 4 presents the average damping percentage for the first frequency for each cable. This information is based on cable scan data.

**Table 4 Percent difference in first frequency average damping percentage for each cable**

Cable	First Frequency	
	Average % Damping, Unbaked	Average % Damping, Baked
1X7	3.40	3.72
1X19	4.96	5.74
1X48	3.65	7.05
7X7	4.83	9.07

This damping ratio data agree very well with previously published data of 3-6% for unbaked cables of similar sizes [3], but bakeout treatment pushes the larger cables outside of this range, providing further evidence that bakeout effects should be taken into account for modeling and design purposes.

There are a few likely mechanisms to explain the cable stiffness softening effect exhibited. First, it was observed that the Tefzel insulation coating had shrunk down around the wire after bakeout, indicating that the Tefzel coating may have shrunk overall, binding the individual conductors more snugly but providing more interstitial space in between the individual wires. The increase in space may lead to a decrease in the radial pressure holding the wires together, thus making the individual wires act more like a flexible set of wires and less like a stiff solid

beam. Another hypothesis relates to the outgassing of plasticizers in cable insulation, but since plasticizers are not present in the Tefzel insulation used for these wires, that is unlikely to be a mechanism that contributes to the changes observed. The Kapton overwrap may also experience changes due to the bakeout treatment; the Kapton becomes more brittle after heat treatment, which may lead to the perception that the cable is stiffer even though its dynamic stiffness has decreased. It was observed that when holding baked and unbaked cables out as cantilevered beams, the baked cable showed a larger amount of end displacement, providing further verification that the baked out cables become less stiff after bakeout.

For the frequency reduction exhibited in the baked out cables, the theoretical model in section III requires a reduction in the bending stiffness value of about an order of magnitude, with the baked out cables having a bending stiffness of about 10% of the unbaked cable when connection stiffness is on the order of  $5E4$  N/m. This is indeed a sizeable change in the bending stiffness value that must be incorporated into cabled structure models if the other model inputs (such as connection stiffness, density, and area) remain the same.

## **VI. Conclusion**

Cable dynamic response was tested before and after the cables experienced heat and vacuum treatment known as bakeout. The cable response after bakeout showed clear and significant differences when compared to the frequency response before bakeout. For the cables tested, a low Earth orbit bakeout reduced the natural frequencies of single-stranded cables by about 14%, reduced multi-stranded cable frequencies by at least 16%, and increased damping in all cable types. The reduction in natural frequency values indicated that the cable became less stiff after bakeout, and amplitude response was diminished due to the increase in cable damping. Current theoretical bending stiffness calculations are unable to capture the effects of bakeout, so to predict cable bending stiffness after bakeout, a bakeout correction factor should be determined or cables must be tested post-bakeout to determine how the modulus of elasticity of the wires, cable inertia, or interwire friction has changed. Thus, the authors recommend that the softening and damping effects due to bakeout be kept in mind when using cable stiffness or frequency values for spaceflight applications that will require bakeout of flight cables.

## Appendix


### Appendix A. Individual Section Tables and Graphs of Cable Comparisons by Section

#### 1 X 7 Cable Section Averages

1X7 Section	Unbaked First Mode Avg Frequency [Hz]	Baked First Mode Avg Frequency [Hz]	% Change	Unbaked Second Mode Avg Frequency [Hz]	Baked Second Mode Avg Frequency [Hz]	% Change
C	47.64	40.78	14.4%	204.40	177.48	13.2%
D	45.14	39.41	12.7%	187.96	157.71	16.1%
E	45.53	37.68	17.2%	194.40	165.21	15.0%
Overall	46.11	39.29	14.8%	195.58	166.80	14.7%

#### 1 X 7 Cable Coefficients of Variation

	First Mode Unbaked	First Mode Baked	First Mode All Trials	Second Mode Unbaked	Second Mode Baked	Second Mode All Trials
C	0.072	0.039	0.110	0.039	0.036	0.100
D	0.061	0.023	0.096	0.036	0.017	0.124
E	0.043	0.035	0.133	0.041	0.043	0.115
Overall	0.059	0.047	0.113	0.038	0.035	0.112

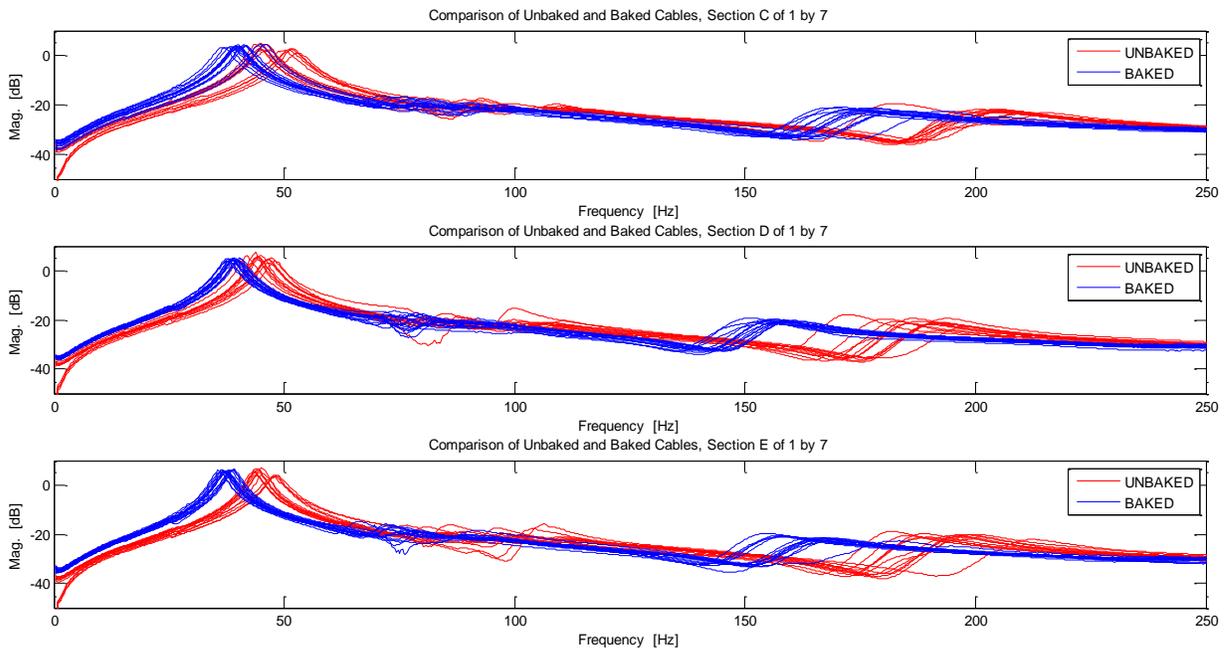


### 1 X 19 Cable Section Averages

1X19 Section	Unbaked First Mode Avg Frequency [Hz]	Baked First Mode Avg Frequency [Hz]	% Change	Unbaked Second Mode Avg Frequency [Hz]	Baked Second Mode Avg Frequency [Hz]	% Change
A	73.96	61.95	16.2%	265.06	230.53	13.0%
B	69.57	60.35	13.2%	255.46	223.24	12.6%
C	67.84	57.54	15.2%	253.27	207.81	17.9%
Overall	70.45	59.95	14.9%	257.93	220.53	14.5%

### 1 X 19 Cable Coefficients of Variation

	First Mode Unbaked	First Mode Baked	First Mode All Trials	Second Mode Unbaked	Second Mode Baked	Second Mode All Trials
A	0.019	0.027	0.125	0.027	0.030	0.099
B	0.011	0.020	0.100	0.022	0.036	0.095
C	0.011	0.026	0.116	0.018	0.031	0.139
Overall	0.015	0.025	0.115	0.023	0.033	0.111

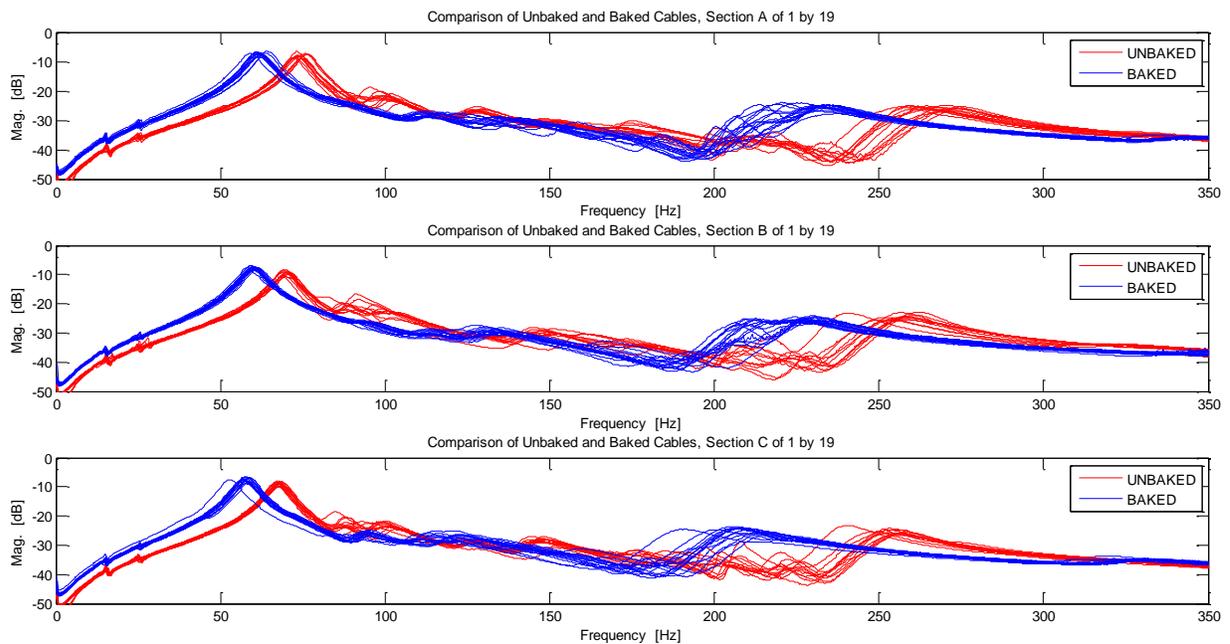


### 1 X 48 Cable Section Averages

1X48 Section	Unbaked First Mode Avg Frequency [Hz]	Baked First Mode Avg Frequency [Hz]	% Change	Unbaked Second Mode Avg Frequency [Hz]	Baked Second Mode Avg Frequency [Hz]	% Change
B	124.45	106.80	14.2%	384.06	346.91	9.7%
D	120.82	104.77	13.3%	402.96	379.48	5.8%
E	123.46	105.47	14.6%	396.47	354.90	10.5%
Overall	122.91	105.68	14.0%	394.50	360.43	8.6%

### 1 X 48 Cable Coefficients of Variation

	First Mode Unbaked	First Mode Baked	First Mode All Trials	Second Mode Unbaked	Second Mode Baked	Second Mode All Trials
B	0.022	0.021	0.108	0.014	0.021	0.072
D	0.029	0.020	0.101	0.026	0.019	0.051
E	0.048	0.026	0.111	0.021	0.049	0.078
Overall	0.034	0.023	0.107	0.032	0.033	0.065

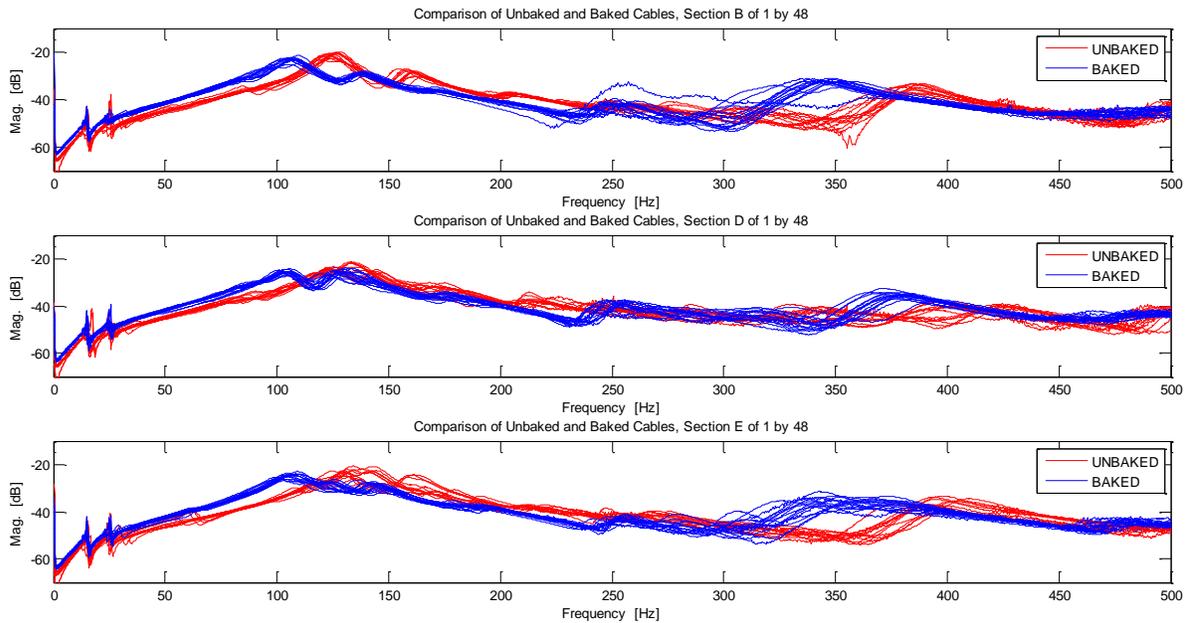


### 7 X 7 Cable Section Averages

7X7 Section	Unbaked First Mode Avg Frequency [Hz]	Baked First Mode Avg Frequency [Hz]	% Change	Unbaked Second Mode Avg Frequency [Hz]	Baked Second Mode Avg Frequency [Hz]	% Change
A	82.79	62.42	24.6%	244.83	212.89	13.0%
B	90.99	68.79	24.4%	250.63	207.23	17.3%
D	84.98	64.00	24.7%	248.39	197.89	20.3%
Overall	86.25	65.07	24.6%	247.95	206.00	16.9%

### 7 X 7 Cable Coefficients of Variation

	First Mode Unbaked	First Mode Baked	First Mode All Trials	Second Mode Unbaked	Second Mode Baked	Second Mode All Trials
A	0.029	0.013	0.198	0.075	0.051	0.099
B	0.020	0.039	0.196	0.014	0.040	0.134
D	0.031	0.035	0.199	0.074	0.046	0.160
Overall	0.026	0.032	0.198	0.059	0.047	0.131

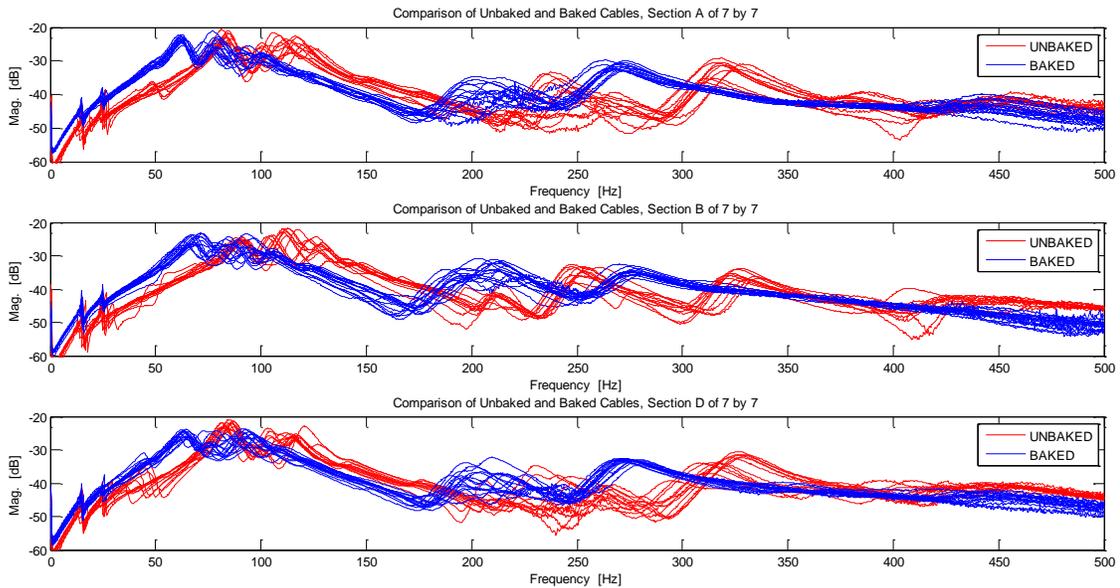

## Acknowledgments

The first author thanks the NASA Space Technology Research Fellowship program for generous support and the Virginia Space Grant Consortium for additional funding, as well as Southern California Braiding, Inc. for providing flight cables at cost. The third author gratefully acknowledges the support of AFOSR Grant number FA9550-10-1-0427 monitored by Dr. David Stargel. Part of this research was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

## References

- [1] Ardelean, E.V., Goodding, J.C., Coombs, D.M., Griffee, J. C., Babuska, V., Robertson, L.M., and Lane, S.A, "Cable Effects Study: Tangents, Rat Holes, Dead Ends, and Valuable Results," *51st AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*, AIAA 2010-2806, AIAA, Orlando, FL, 2010.
- [2] Coombs, D. M., Goodding, J. C., Babuska, V., Ardelean E., Robertson L. M., and Lane S.A., "Dynamic Modeling and Experimental Validation of a Cable-Loaded Panel," *Journal of Spacecraft and Rockets*, Vol. 48, No. 6, 2011, pp. 958-973.  
doi: 10.2514/1.51021
- [3] Goodding, J. C., Ardelean, E. V., Babuska, V., Robertson, L.M., and Lane, S. A., "Experimental Techniques and Structural Parameter Estimation Studies of Spacecraft Cables," *Journal of Spacecraft and Rockets*, Vol. 48, No. 6, 2011, pp. 942-957.  
doi: 10.2514/1.49346
- [4] Babuska, V., Ardelean, E., Robertson, L.M., Lane, S.A., "Modeling and Experimental Validation of Space Structures With Wiring Harness," *Journal of Spacecraft and Rockets*, Vol. 47, No. 6, 2010, pp. 1038-1052. doi: 10.2514/1.48078
- [5] NASA MFSC SPEC 1238:2007, "Thermal Vacuum Bakeout Specification for Contamination Sensitive Hardware," George C. Marshall Space Flight Center, 2007.[6] Costello, G.A., *Theory of Wire Rope*, 2<sup>nd</sup> ed., Springer, New York, 1997, pp. 1-25.
- [6] Costello, G.A., *Theory of Wire Rope*, 2<sup>nd</sup> ed., Springer, New York, 1997, pp. 1-25.
- [7] Raoof, M., "Effect of Lay Angle on Various Characteristics of Spiral Strands," *International Journal of Offshore and Polar Engineering*, 1997, Vol. 7, No. 1, pp. 54-62. ISSN: 1053-5381
- [8] Inman, D.J., *Engineering Vibration*, Pearson Education, New Jersey, 2012, pp. 546-550.
- [9] Yamaguchi, H., Adhikari, R., "Energy-Based Evaluation of Modal Damping in Structural Cables With and Without Damping Treatment," *Journal of Sound and Vibration*, 1995, Vol. 181, No. 1, pp. 71-83. doi: 10.1006/jsvi.1995.0126
- [10] Papailiou, K.O., "On the Bending Stiffness of Transmission Line Conductors," *IEEE Transactions on Power Delivery*, 1997, Vol. 12, No. 4, pp. 1576-1585. doi: 10.1109/61.634178

- [11] Goodding, J.C., Babuska, V., Griffith, D.T., Ingram, B.R., and Robertson, L.M., "Study of Free-Free Beam Structural Dynamics Perturbations Due to Mounted Cable Harness," *48th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*, AIAA 2007-2390, AIAA, Honolulu, HI, 2007. doi: 10.2514/6.2007-2390
- [12] Goodding, J.C., Griffiee, J.C., and Ardelean, E.V., "Parameter Estimation and Structural Dynamic Modeling of Electrical Cable Harnesses on Precision Structures," *49th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*, AIAA 2008-1852, AIAA, Waikiki, HI, 2008. doi: 10.2514/6.2008-1852
- [13] Knapp, R.H., and Liu, X., "Cable Vibration Considering Interlayer Coulomb Friction," *International Journal of Offshore and Polar Engineering*, 2005, Vol. 15, No. 3, pp. 229-234. ISSN: 1053-5381
- [14] Ewins, D.J., *Modal Testing: Theory, Practice and Application*, 2nd ed. Research Studies Press Ltd, England, 2000.
- [15] Spak, K.S, Agnes, G.S., Inman, D.J., "Toward Modeling of Cable Harnessed Structures: Cable Damping Experiments," *54th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*, AIAA-2103-1889, Boston, MA, 2013. doi: 10.2514/6.2013-1889
- [16] Jha, R., Pausley, M., Ahmadi, G., "Optimal Active Control of Launch Vibrations of Space Structures," *Journal of Spacecraft Rockets*, Vol. 40, No. 6, 2003, pp. 868-874. doi: 10.2514/2.7051
- [17] Arianespace, "Ariane 5 User's Manual," Issue 5, Revision 1, July 2011, p. 74.
- [18] Raouf, M., Davies, T.J., "Simple Determination of the Maximum Axial and Torsional Energy Dissipation in Large Diameter Spiral Strands," *Computers and Structures*, Vol. 84, 2006, pp. 676-689. ISSN 0045-7949.